

REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
Ref.	DRAWN	吳岳峰	王盛富	郭豐榮	2019.10.08

**SPECIFICATIONS**

Current Rating:  
3 Amp

Voltage Rating:  
230V

Insulator resistance:  
5000 Megohms Min.

Contact resistance:  
20 m ohms Max.

Dielectric withstanding:  
AC 500V/minute

Operating Temperature:  
-25°~+85°C

Contact Material:  
Brass

Insulator Material:  
PBT  
+Glass Fiber  
UL94V-0

Color:  
Black

Contact Plated:  
Gold Flash

Note:  
Appearance are completely  
match the rule of the  
products inspection procedure

**RoHS Compliant**

**Ordering information:**  
21X12564-XXS21X-XXX-A/B/C\*X

B PBT  
N Nylon-6T  
L LCP



Number of Contact  
04-80

Color  
B Black

\*A Box  
\*B Tube  
\*P Bag  
\*R Reel  
\*T Tray

Dimension  
G Gold Plated  
T Tin Plated  
H Duplex Plated

Contact Plating  
01 Normal  
11 Normal matte tin  
10 10μ"  
∴ ∴

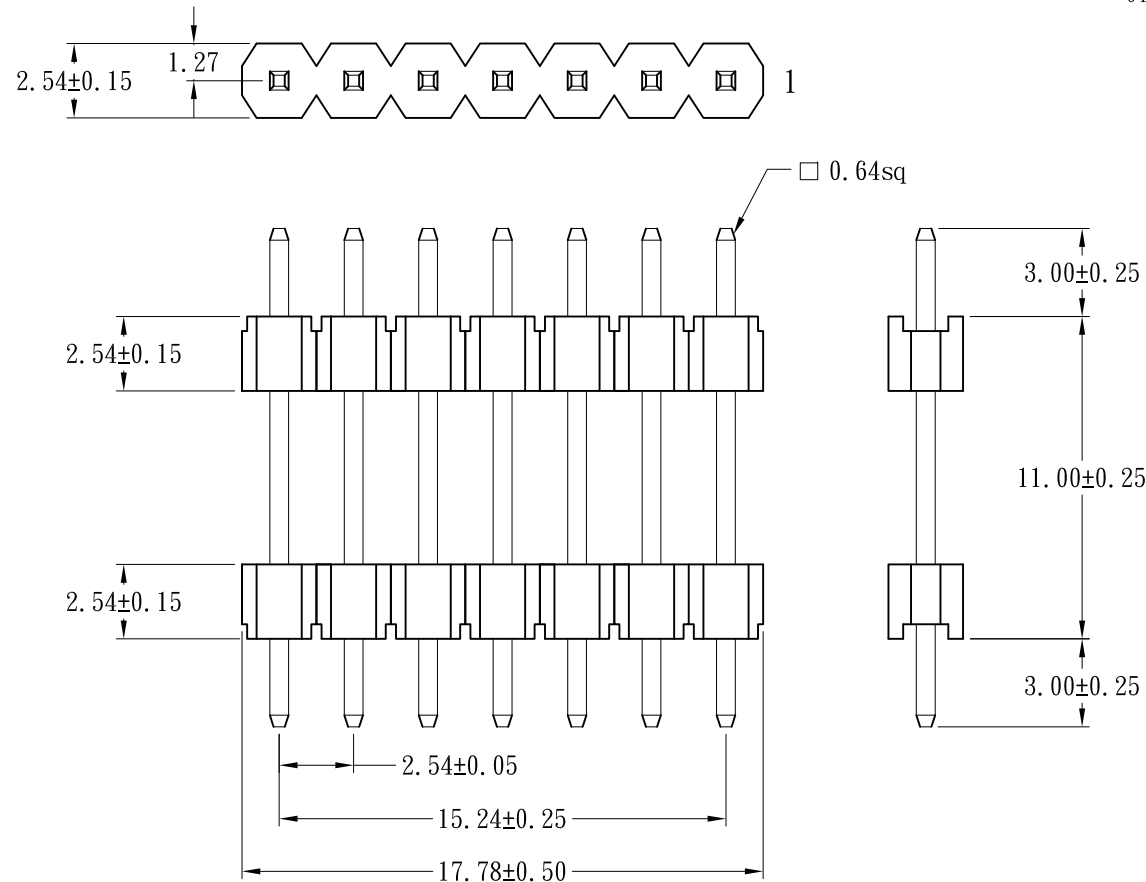

RECOMMENDED P. C. B. LAYOUT

<p><b>成品規格圖</b></p>				APP.	ANGLES	±3°	SIZE	A4
				TITLE	2.54mm Pin Header Straight Type	DIMS	0.0 ±0.38	SCALE
PART NO.	21B12564-07S21B-01G-3/11/3*P	TOLERANCE	0.00±0.25	SHEET	1/1			
DRW NO.	21-20191008-002	DR.						
UNIT	mm(INCH)	PROJECT	◎ ◁					