
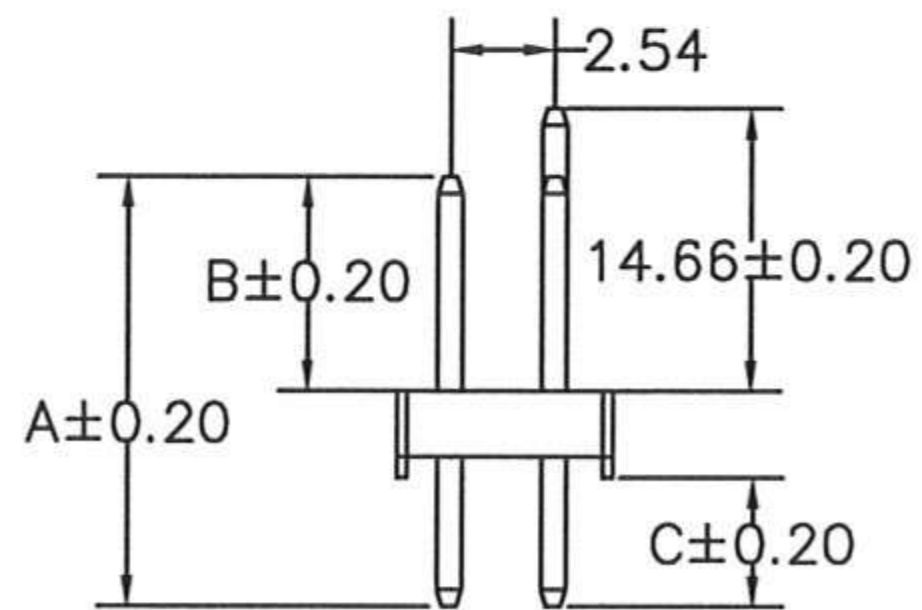


RECOMMENDED P.C.B LAYOUT

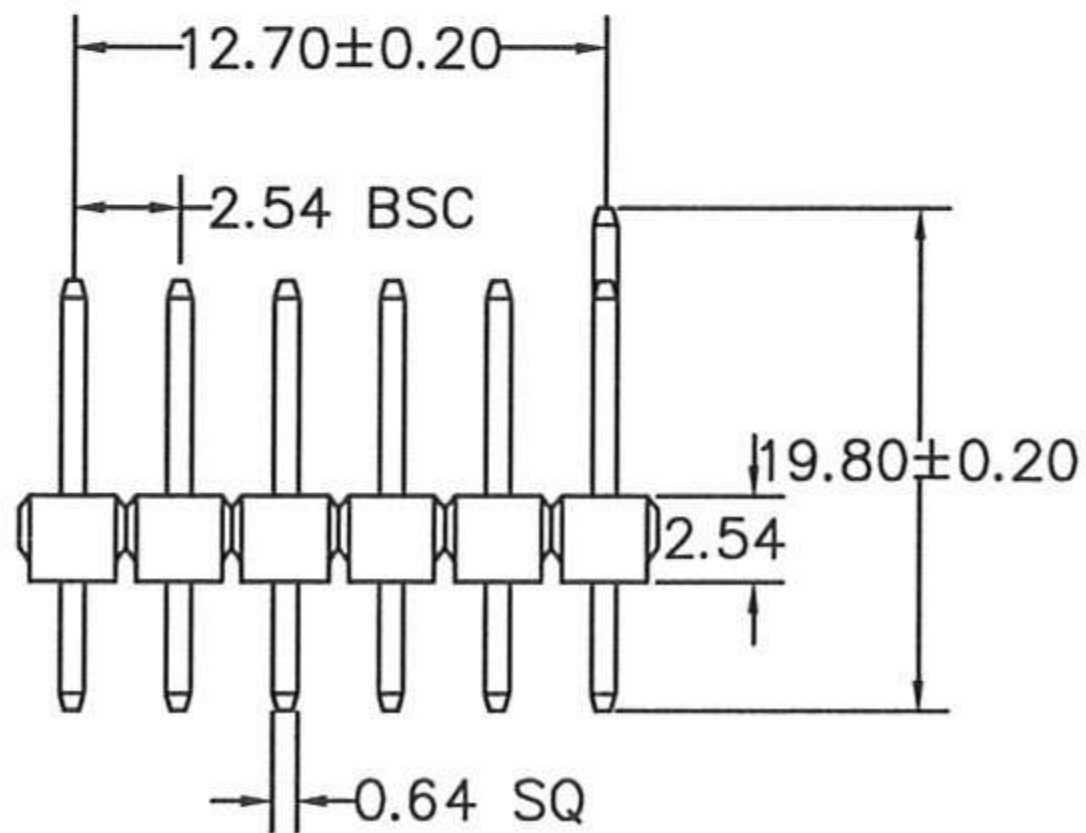

A: 17.70 mm B: 12.56 mm C: 2.60 mm

MATERIAL

HOUSING : THERMOPLASTIC UL94V-0
CONTACT : COPPER ALLOYS

SPECIFICATION

CURRENT: 3A
OPERATING TEMPERATURE: -55°C TO +105°C
CONTACT RESISTANCE : 20 MILLIOHMS MAX
INSULATION RESISTANCE : 1000 MEGAOHMS MIN
WITHSTANDING VOLTAGE: AC 1000V RMS

比例 (SCALE)	FREE	繪圖 (DRAW)		MCN-1003-0022	
單位 (UNIT)	MM	審核 (CHECK)	/ /		
一般公差 (TOLERANCE)		承認 (AP' E)	/ /	圖名 (NAME) : PIN HEADER 2.54	
.0=±0.38 .00=±0.25 ANG=±5°	投影法 PROJECTION	第三角		料號 (PART NO)	111-2XX1-XXXX
				圖號 (DRAW NO)	1X