




## SPECIFICATIONS

### ELECTRICAL

- Contact Current Rating : 3 Amperes
- Contact Resistance : 20 mΩ Max
- Insulator Resistance : 5000 MΩ Min
- Dielectric Withstanding Voltage : 500 V AC RMS 60 Seconds

### MATERIAL

- Insulator : Nylon-6T , UL 94-0
- Contact : Brass
- Contact Plated : Gold Plated , Tin Plated , Selective Plated
- Operation Temperature : - 40°C to + 105°C

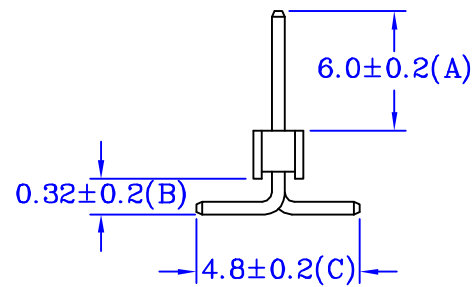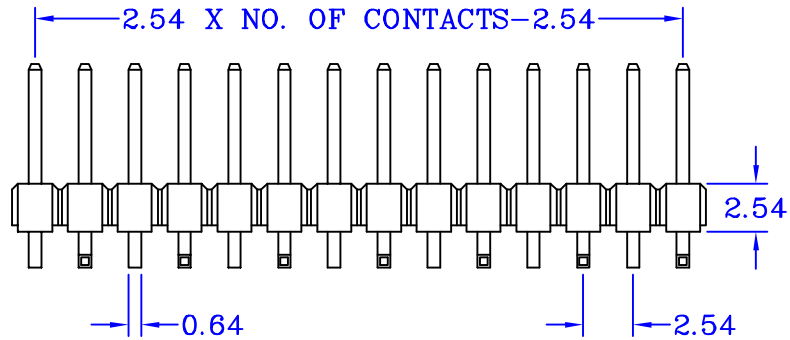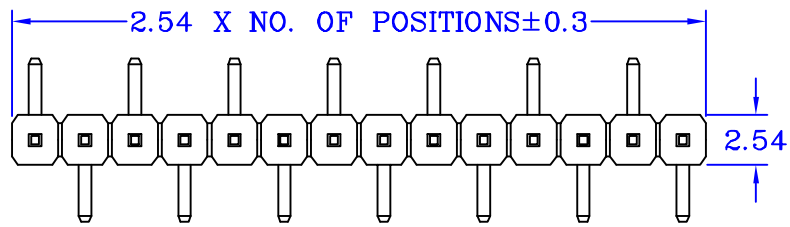

A = mm

B = mm

C = mm

UNIT: mm