

A**B****C****D****E****Specifications:****Rating:**

Current Rating : 1.0 Amp

Voltage Rating : 200V AC/DC

Operating Temperature Range : -40°~+105°C

Electrical:

Contact resistance : 20m Ohm Max

Insulator resistance : 500M ohm min.

Withstanding Voltage : 500V AC/Minute

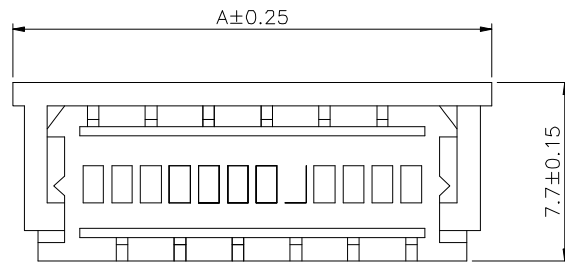
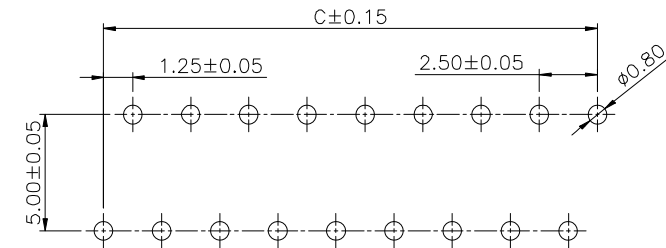

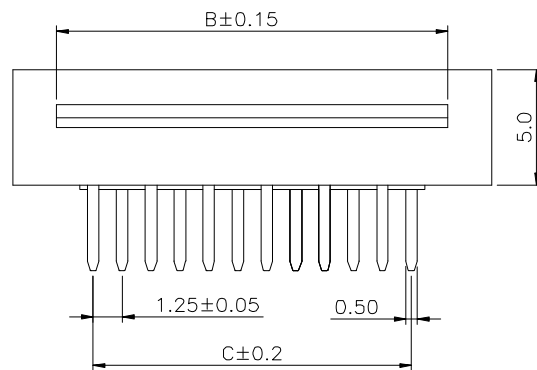
Material And Finish:

Housing : PBT, UL94V-0 Natural

Terminal : Phosphor Bronze,

Plating: Tin plated Over Nickel

No.of CKTS	A	B	C
03	9.40	5.50	2.50
04	10.65	6.75	3.75
05	11.90	8.00	5.00
06	13.15	9.25	6.25
07	14.40	10.50	7.50
08	15.65	11.75	8.75
09	16.90	13.00	10.00
10	18.15	14.25	11.25
11	19.40	15.50	12.50
12	20.65	16.75	13.75
13	21.90	18.00	15.00
14	23.15	19.25	16.25
15	24.40	20.50	17.50
16	25.65	21.75	18.75
17	26.90	23.00	20.00
18	28.15	24.25	21.25
19	29.40	25.50	22.50
20	30.65	26.75	23.75
21	31.90	28.00	25.00
22	33.15	29.25	26.25
23	34.40	30.50	27.50
24	35.65	31.75	28.75
25	36.90	33.00	30.00
26	38.15	34.25	31.25
27	39.40	35.50	32.50
28	40.65	36.75	33.75
29	41.90	38.00	35.00
30	43.15	39.25	36.25
31	44.40	40.50	37.50
32	45.65	41.75	38.75

1**1****2****2**(Tolerance:0.05)
Recommended PCB Layout**3****3**

DESCRIPTION(内容):	DRAWN(製圖):	GENERAL TOLERANCE:	REV:	REV	DESCRIPTION	DATE
1.25mm PITCH FPC Right Angle Top Contact A Type (RoHS)	HUANG	. ±0.30 .X ±0.20 .XX ±0.10	R0	R0		2020.08.19
	CHECKED(確認):		UNIT:	R1		
PART NO:	TERESA	SCALE(比例):	A4	R2		
(料號) MCN-1010-0033	APPROVAL(核准):	FREE	SHEET:	R3		
DWG NO(圖號): 0012137	JOHNNY		1/1			

A**B****C****D****E**