
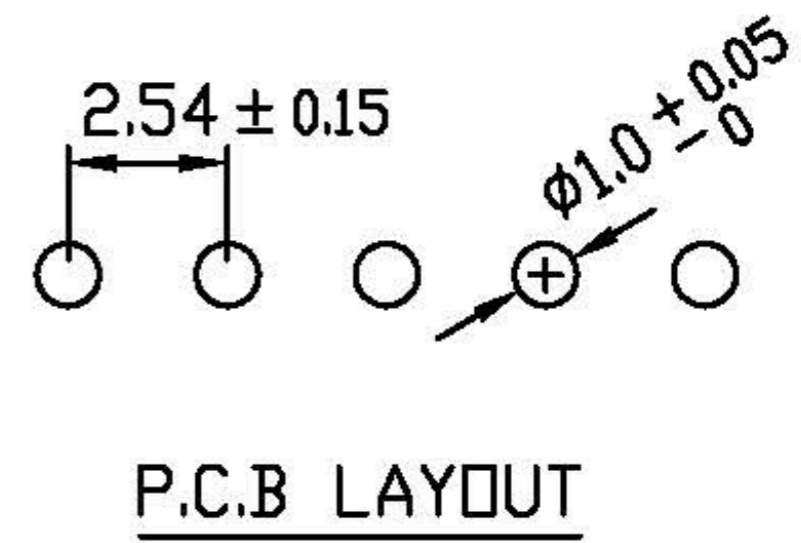


成品製造管制圖

DRAWING OF FINISHED PRODUCTS

禁止使用1級環境管理物質
Non-use Warranty for Level 1
Prohibited Substances in Product.

Pich 2.54mm
間距 (.100")

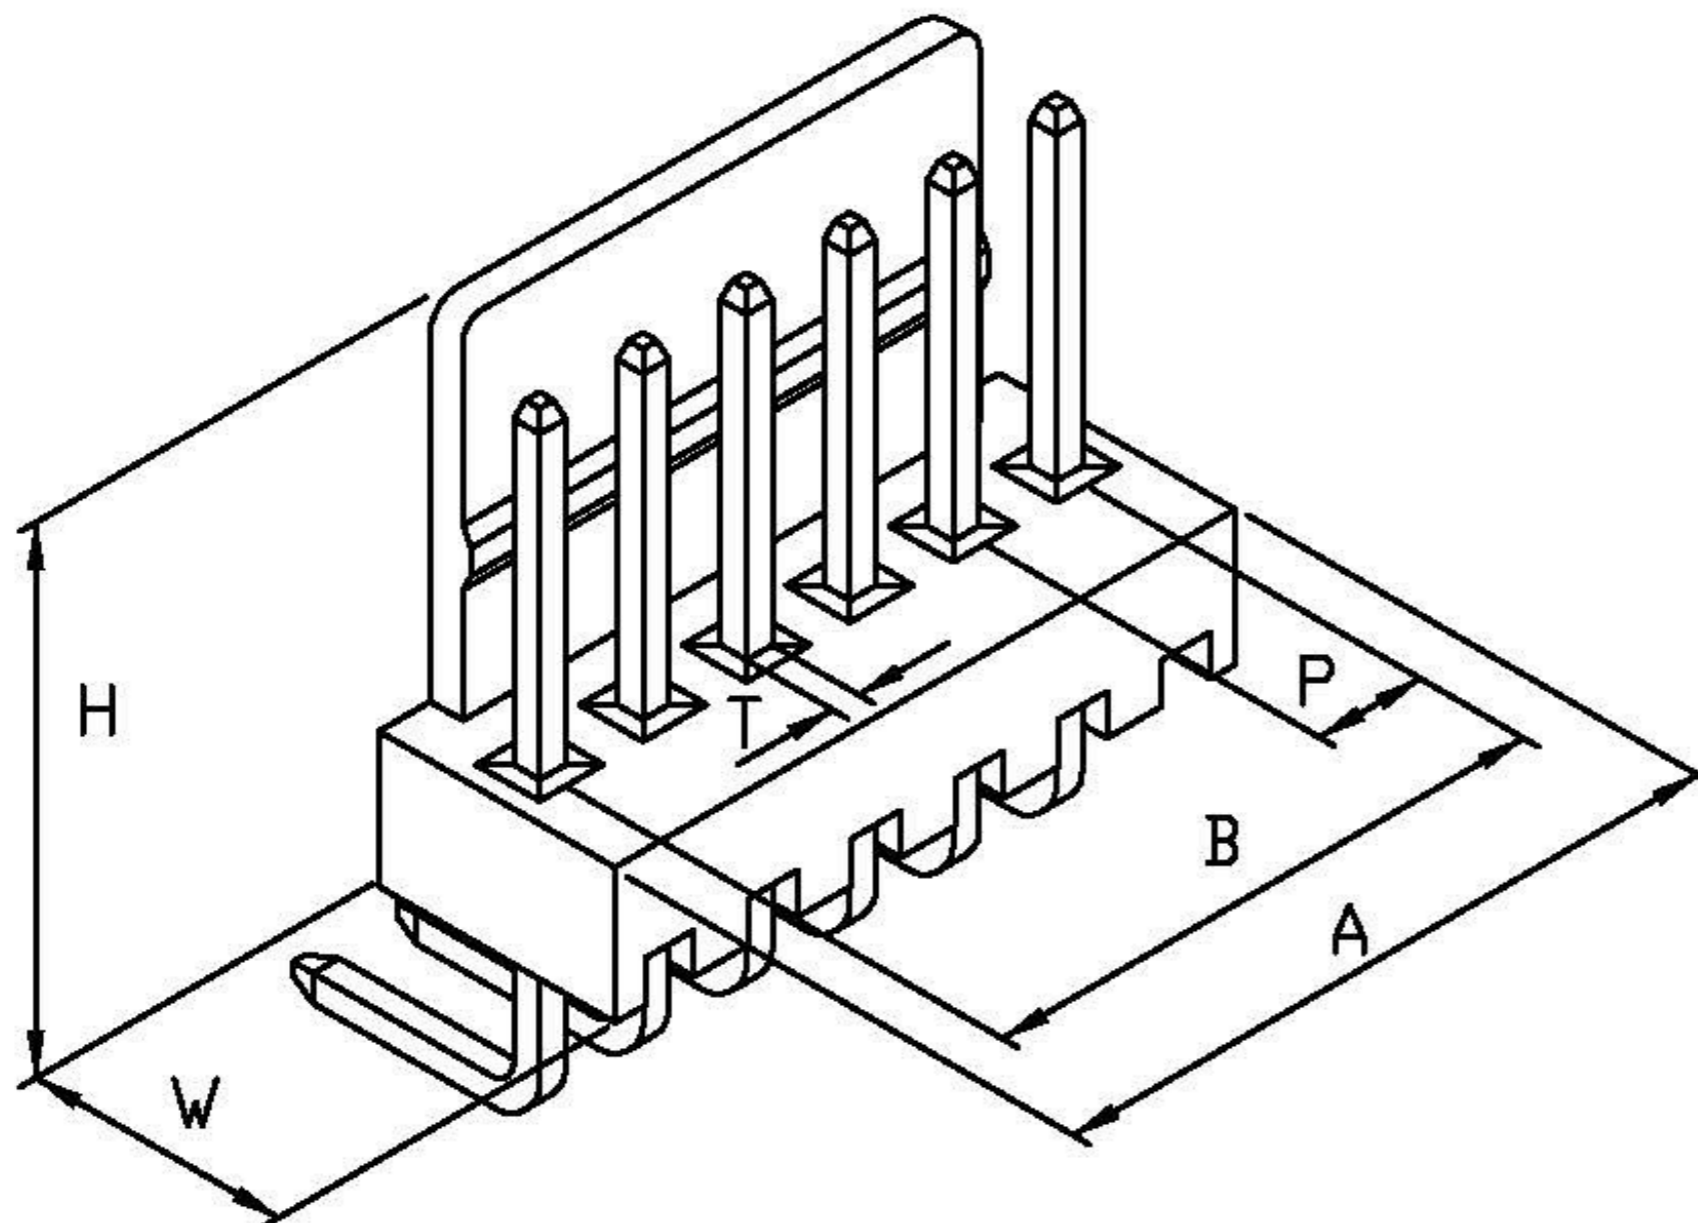

產品編號 Part No:

品名 Product: 塑膠公座-DIP CONNECTOR-DIP

材質 Material: Housing: NYLON 94V-2

Contact Pin: Brass, Tin plated.

DIMENSION(MM)

P: 2.54 ± 0.1

W: 5.8 ± 0.2

H: 11.5 ± 0.3

T: □ 0.64 ± 0.03

PIN	A±0.3	B±0.2
2R	5.08	2.54
3R	7.62	5.08
4R	10.16	7.62
5R	12.70	10.16
6R	15.24	12.70
7R	17.78	15.24
8R	20.32	17.78
9R	22.86	20.32
10R	25.40	22.86
11R	27.94	25.40
20R	51.40	48.76

額定電壓/電流 Current Rating:

AC/DC 250V 3A(24~28AWG#)

絕緣阻抗 INS. Resistance: 1000MΩ Min.

耐電壓 Withstand Voltage: 1000V AC/1minute.

適用溫度 Operation Temp: -25°C~+85°C

顏色 Colour: 本色 (Natural)

* 本成品圖僅供參考, 若需做為承認用請聯絡就近業務員確認

(The drawing is for reference only,

please contact the sales division nearby for final confirmation if it's for approval purpose.)